



安装外形图 Overall dimension

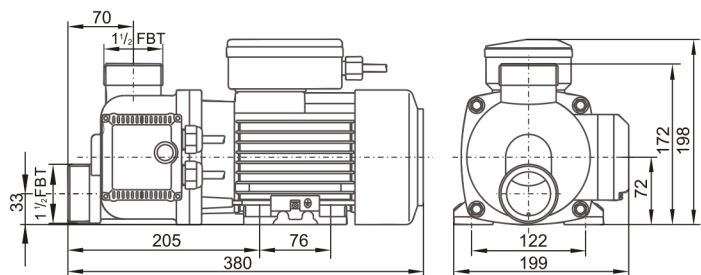

性能曲线 Performance curves

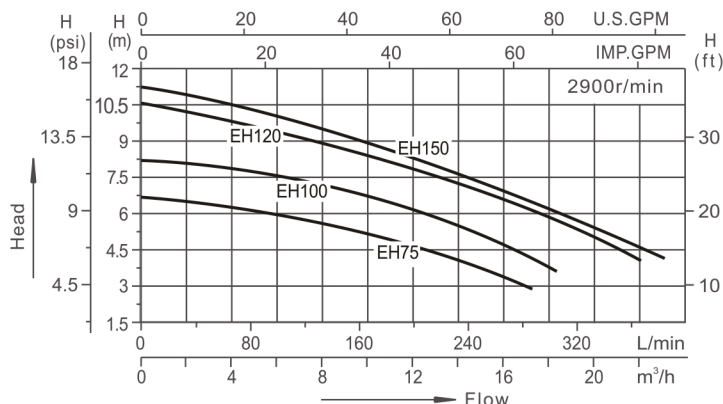

Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID: 0000021818



EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233 : 2008
ERP547/2012

SAA
A/12089EA

AS/NZS60335.1
AS/NZS60335.2.41

*电热管功率(Power of Heating Element):
1000W, 1500W, 2000W, 2500W, 3000W



海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件


介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa



内置电热管
The built-in Heating Element

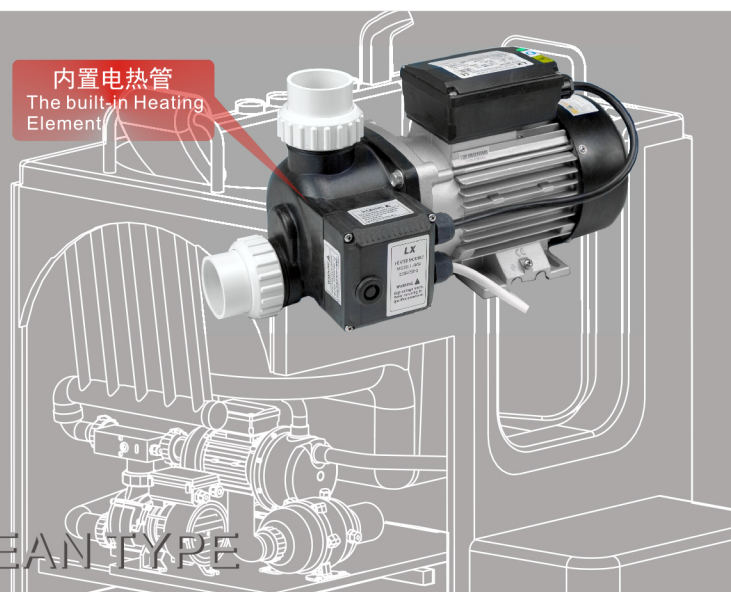

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	电机输入功率 Motor Power(P ₁) kW HP		电机电流 Motor Amps (A)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
EH75	280	6.5	220-240/50	0.55	0.75	3.2	48.5or50	8.8	410×225×255
EH100	300	8	220-240/50	0.75	1.0	3.8	48.5or50	9.7	410×225×255
EH120	360	10.5	220-240/50	0.9	1.2	4.6	48.5or50	10	410×225×255
EH150	380	11	220-240/50	1.1	1.5	5.8	48.5or50	10.4	410×225×255

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	六角头螺钉 Hexagon Screw
5	平垫圈 Flat spacer
6	泵壳 Pump Casing
7	叶轮 Impeller
8	O形圈 O-Ring
9	机械密封 Mechanical seal
10	泵盖 Pump Cover
11	电机 Motor
12	电热管组件 Heating element
13	胶垫 Plastic spacer

序号 NO.	名称 Name
14	O形圈 O-Ring
15	出线盒 Terminal Box

