


安装外形图 Overall dimension

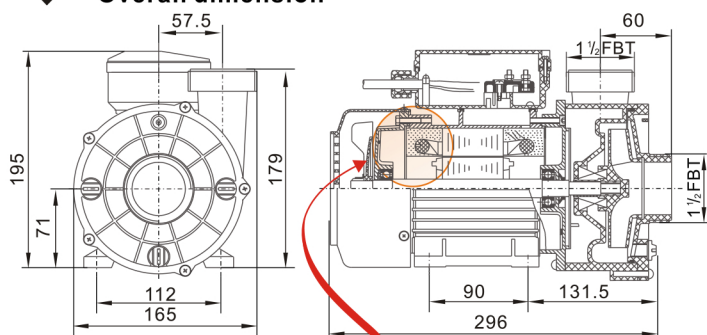


聚氨酯(PU)

*定子采用塑封工艺,防水性能好

*E级温升考核,温升低,寿命长;

- Stator under plastic craft, waterproof;

- E class of temperature rise, low temperature. Long life



海水养殖循环过滤
Mariculture circulation filter




浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

性能曲线 Performance curves

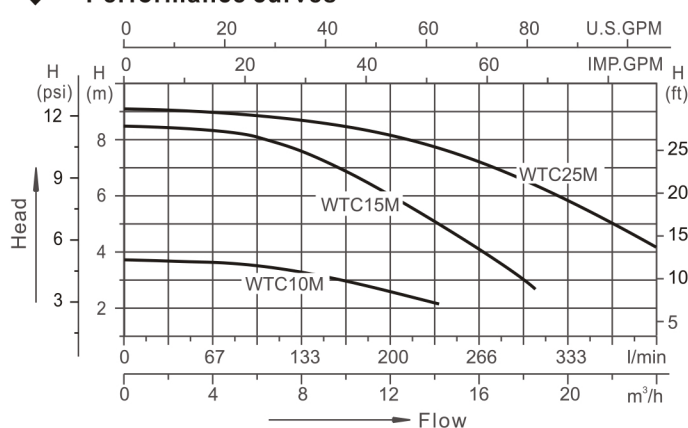

欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	转速 Speed (r/min)	输入功率 Power(P ₁) kW HP	电流 Amps	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
WTC10M	240	3.8	220-240/50	1400	0.25 0.35	1.6	48.5or50	5.7	330×180×255
WTC15M	300	8.5	220-240/50	2900	0.55 0.75	3.2	48.5or50	6.8	330×180×255
WTC25M	400	9	220-240/50	2900	0.75 1.0	3.5	48.5or50	8.2	330×180×255

工作条件

介质温度: 5-50℃

环境温度: <75℃

最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃

Environmental temperature: <75℃

Max.working pressure: 0.3MPa

序号 NO.	名称 Name
1	接头螺母 Tie Nut
2	接头 Tie
3	O形圈 O-Ring
4	十字盘头螺钉和平垫圈组合件 cross recessed pan head screw and washer assemblies
5	泵盖 Pump Cover
6	叶轮 Impeller
7	机械密封 Mechanical seal
8	O形圈 O-Ring
9	泵壳 Pump Casing
10	电机 Motor

