

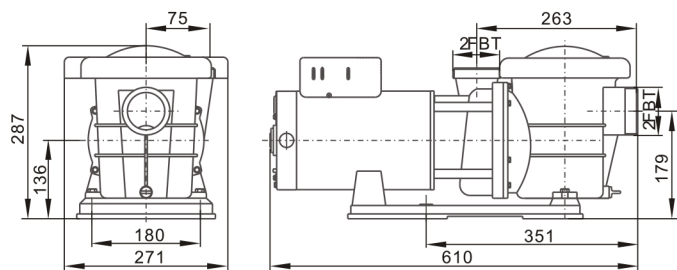


安装外形图 Overall dimension




性能曲线 Performance curves

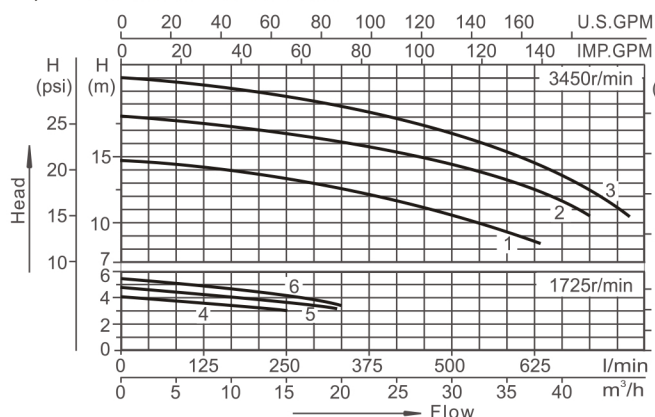

海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

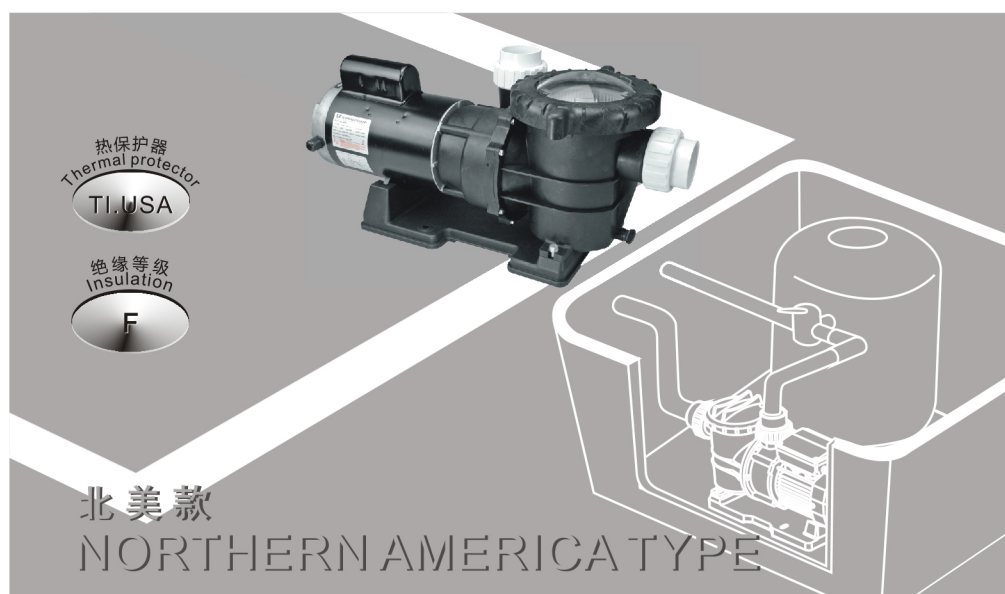

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	功率Power				电流 Amps	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
					P ₂ kW	P ₂ HP	P ₁ kW	P ₁ HP				
SUA200-I	635	14.5	1	220-240/60	1.1	1.5	1.5	2.0	8.0	60.3or63	19	645×305×345
SUA300-I	710	18	2	220-240/60	1.5	2.0	2.2	3.0	10	60.3or63	19.5	645×305×345
SUA400-I	765	21	3	220-240/60	2.0	2.5	3.0	4.0	12	60.3or63	21.5	645×305×345
SUA200-II	280	3	4	220-240/60	0.18	0.25	0.37	0.5	(Low speed)3.0	60.3or63	18.5	645×305×345
	635	14.5	1		1.1	1.5	1.5	2.0	(High speed)8.0			
SUA300-II	300	3.5	5	220-240/60	0.22	0.3	0.55	0.75	(Low speed)3.5	60.3or63	20.5	645×305×345
	710	18	2		1.5	2.0	2.2	3.0	(High speed)10			
SUA400-II	350	4	6	220-240/60	0.3	0.4	0.55	0.75	(Low speed)4.4	60.3or63	22	645×305×345
	765	21	3		2.0	2.5	3.0	4.0	(High speed)12			

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-Ring
4	放水螺塞 Drainage Plug
5	O形圈 O-Ring
6	六角头螺栓和平垫圈组合件 Hexagon head bolt and plain washer assembling
7	泵盖 Pump Cover
8	滤篮 Filter
9	透视盖胶垫 Transparent cover pad
10	透视盖 Transparent Cover
11	透视盖压盖 Gland Cover
12	O形圈 O-Ring
13	叶轮 Impeller
14	机械密封 Mechanical seal
15	泵壳 Pump Casing

序号 NO.	名称 Name
16	电机 Motor
17	底板胶条 Block Gine
18	六角头螺栓 Hexagon bolt
19	平垫圈 Washer
20	底板 Foot

