



安装外形图 Overall dimension

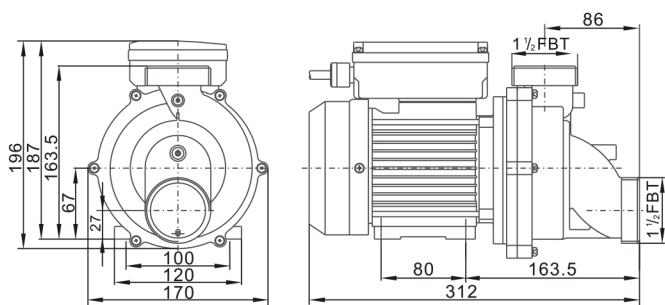

性能曲线 Performance curves

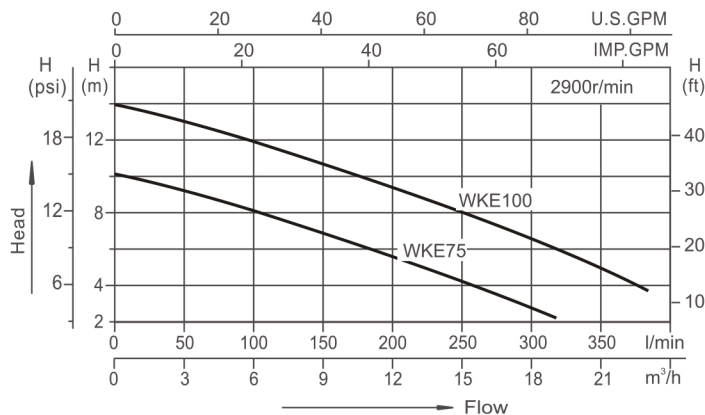


海水养殖循环过滤
Mariculture circulation filter



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

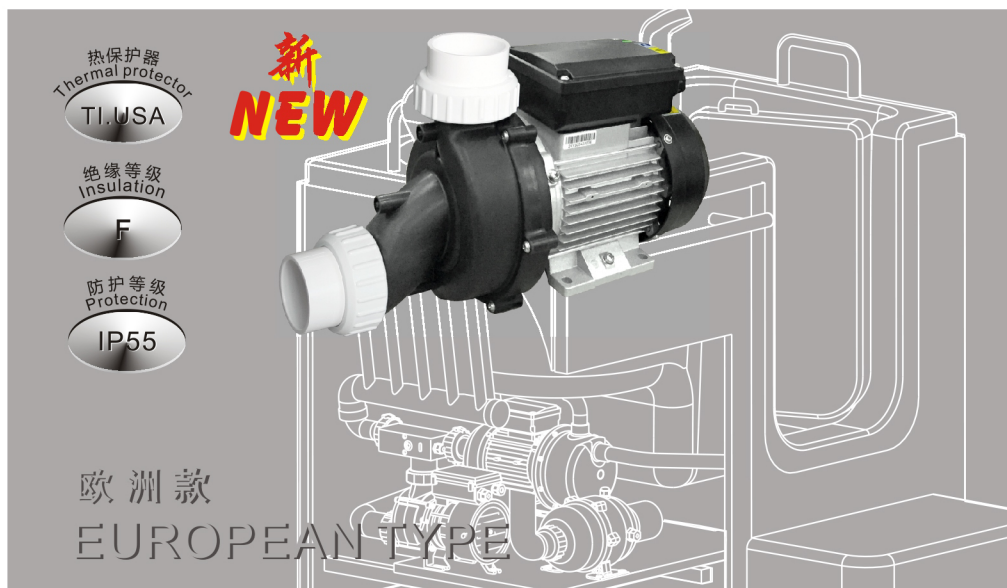

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	电压/频率 V/Hz	输入功率 Power(P1)		电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
				kW	HP				
WKE75	330	10	220-240/50	0.55	0.75	3.2	48.5or50	6.1	335×195×250
WKE100	450	14	220-240/50	0.75	1.0	3.8	48.5or50	6.9	335×195×250

230V/60Hz, 110V/60Hz, 110V/50Hz models are available on request

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

序号 NO.	名称 Name
1	接头螺母 Tie-in Nut
2	接头 Tie
3	O形圈 O-ring
4	十字槽盘头螺钉和平垫圈组合件 Cross recessed pan head screw and washer assemblies
5	泵盖 Pump Cover
6	O形圈 O-ring
7	活动口环 Activities Rings
8	叶轮 Impeller
9	机械密封 Mechanical Seal
10	泵壳 Pump Casing
11	电机 Motor

